
TACTICAL&FIXED HF ANTENNA SYSTEM 1.5 TO 30 MHz.


CONTINUOUS TUNING ANTENNAS


Mod. 1530/F-M


It is Half a rombic terminated and vertically polarized antenna with RF transformer. It does not require any tuner in 1.5 – 30 MHz spectrum. It can be assembled in V-inverted or sloper version and it does not require particular heights so a 6 to 12 m (19.6 to 39.2 ft.) support is suitable.

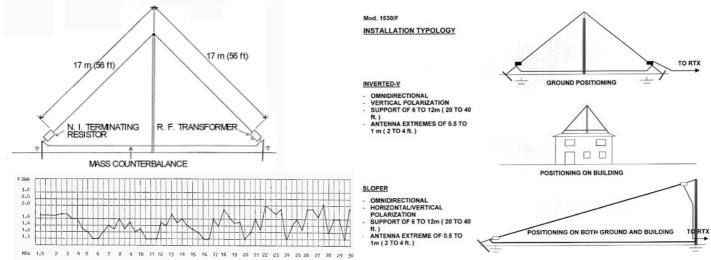


Mechanical-electrical features	Mod. 1530/F-M
Continuous covering MHz	1.5 - 30
Max. applicable power	1KW PeP
SWR	See graph
Impedance	50 ohms
Connector	N female
Length	34m(17+17 m) 112ft(56+56ft)
Net weight	3 kg (6.6 lbs)
Max. speed of wind	160 km/h (100 mph)
Operating temperature range	-30 - +60 °C
Storage	-40 - +85 °C
Shipping Wt.	6 kg (13 lbs)
Box	cm 70x25xh8 (28x10xh3 in)













GIOVANNINI Elettromaccanica "Antenna Systems " Via Enrico Mattei 9 – 50039 Vicchio (Florence) Italy – Phone +39 055844124 Fax +39 0558497843 e-mail: <u>giovannini@antenna.it</u>